
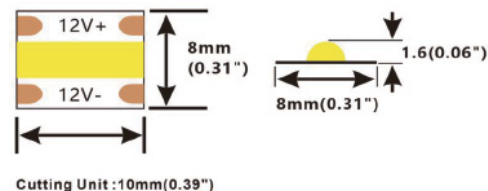


Flexible Chip-On-Board Pro Series- DFV


【Features】

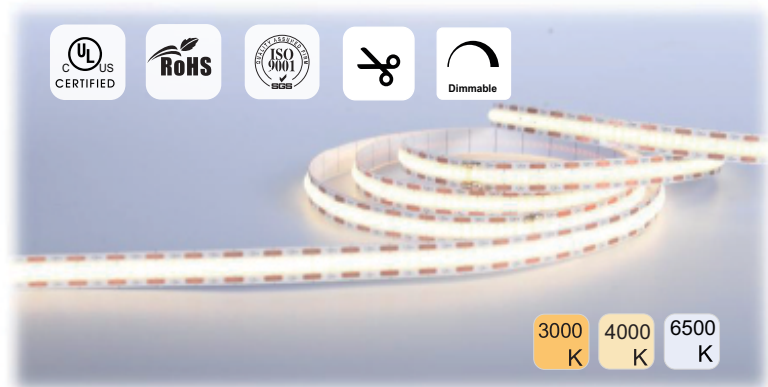

【Parameters】

SKU#	CCT/ Color Tone	CRI	Rated Working Voltage	Rated Power	Lumens	Length	Weight	QTY/ Box
LS-DFV12W10L5-WW	3000K	>90	12 V	8 W/m 2.4 W/ft	780 LM/M (237LM/ft)	5 Meter (16.4ft)	0.26 Kg/pcs 15.6 Kg/Box	60Pcs/Box 41x41x26 mm
LS-DFV12W10L5-DW	4000K							
LS-DFV12W10L5-CW	6000K+							
LS-DFV12W10L25-WW	3000K					25 Meter (82.5ft)	0.7 Kg/pcs 14 Kg/Box	20Pcs/Box 41x41x26 mm
LS-DFV12W10L25-DW	4000K							
LS-DFV12W10L25-CW	6000K+							

【Light Distribution】

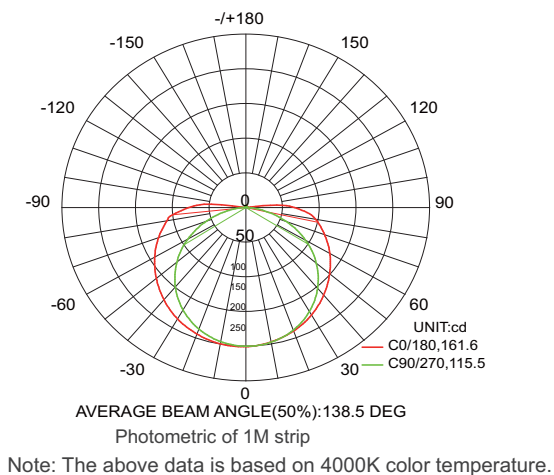

Flux out:599.5 lm

Height	Eavg,Emax	Angle:138.50deg	Diameter
1m	25.28,200.7lx		527.89cm
2m	6.320,50.17lx		1055.78cm
3m	2.809,22.30lx		1583.67cm
4m	1.580,12.54lx		2111.56cm
5m	1.011,8.027lx		2639.45cm
6m	0.7022,5.574lx		3167.35cm
7m	0.5159,4.096lx		3695.24cm
8m	0.3950,3.136lx		4223.13cm
9m	0.3121,2.478lx		4751.02cm
10m	0.2528,2.007lx		5278.91cm