


3. Operating Instruction for Receiver:

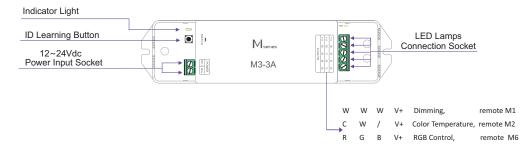

4. Engaging The Remote (M1, M2, or M6) and The Receiver (M3-3A):

The remote and the receiver have been engaged before leaving factory. If they are unpaired accidentally, please engage the remote and the receiver.

Before engaging or disengaging, double if the power has been connected to the receiver properly. The indicator light of the receiver will be flashing.

Engage: Short press ID Learning Button on the M3-3A receiver, the indicator light will blink quickly,

then press any key on the remote M1/M2/M6. The indicator light will flash several times.


The remote and the Controller are engaged.

Disengage: Long press ID Learning Button on the M3-3A Receiver for 5 seconds. It will erase the

previous engagement.

Attention: One receiver M3-3A can be engaged with max of 10 same or different kinds remote.

5. Wiring Diagram:



M1 Remote Single Color Strip Lights



M2 Remote
CCT Changable Strip Lights





RGB Strip Lights
M6 Remote



