

LT series LED controller

RF

M1/M2/M6

1. Parameter:

Remote:

Model:	M1/M2/M6
Working Voltage:	3Vdc (Cr2032 Button Battery)
Working Frequency:	433.92 MHZ
Remote Distance:	30m
Working Temp.:	-30°C~55°C
Weight(N.W.):	42g

CV Receiver:


Model:	M3-3A
Input Voltage:	12~24Vdc
Current Load:	3A×3CH Max. 9A
Max Output Power:	Max. 108W @ 12V Max. 216W @ 24V
Protection:	Short Circuit / Over Current
Working Temp.:	-30°C~55°C
Weight(N.W.):	47g



FC RoHS (warranty 5 years)

Skylighting offers 3 types of LT series LED controllers. M1/M2/M6

2. Product Size:

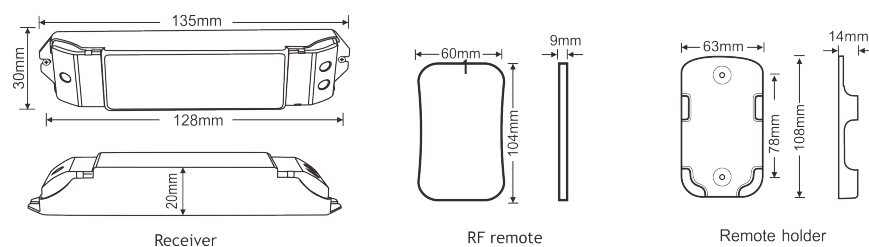

3. Way To Operate The Remote :

M1/M2/M6 sleep mode: when the Remoter unattended operation over 30s, it can automatically enter standby mode to extend battery life. press any of these four keys to continue.

