

M_{series} LED controller M6+M4-5A

RF



Wall-mounted

1. Parameter:


Remote(RGB):

Model:	M6
Working Voltage:	3Vdc (battery Cr2032)
Working Frequency:	433.92MHz
Remote Distance:	30m
Working Temp.:	-30°C~55°C
Weight(N.W.):	42g

CV Receiver (RGB):

Model:	M4-5A
Input Voltage:	12~24Vdc
Current Load:	5A×4CH Max. 20A
Max Output Power:	(0...60W~120W)×4CH Max. 480W
Protection:	Short circuit / Over current
Working Temp.:	-30°C~55°C
Weight(N.W.):	125g

2. Product Size:

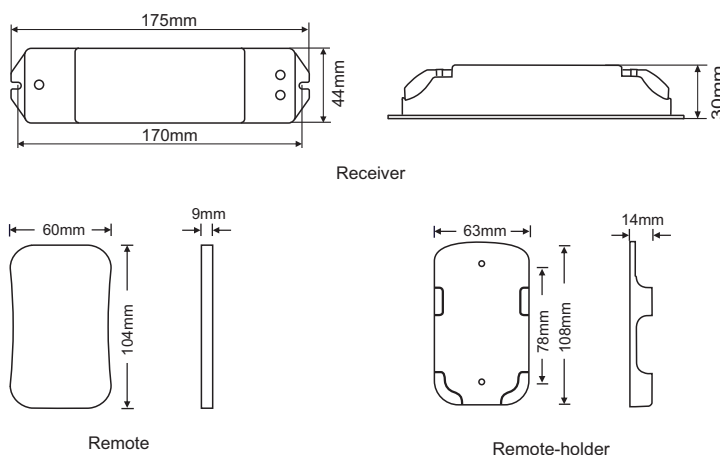

FC CE RoHS

warranty
5 years

SGS
UL94V-0
ISO9001:2008