


Flexi Neon: DN 0306 Series

【Features】


- **Flexible and Durable:** Provides even light output, LM 80 Proved.
- **Resistant to Saline Solution, Acid, Alkali, Corrosive Gases and UV.**
- **Waterproof:** Made with environmentally friendly silicone.
- **Certified Compliance:** cULus, ROHS, and UKCA certified.
- **High Luminous Efficiency:** Meets LM80 requirements.
- **Operating/Storage Temperature:** -25°C to 55°C (Operating), 0°C to 60°C (Storage).
- **Application:** Indoor lighting.



【Light Distribution】

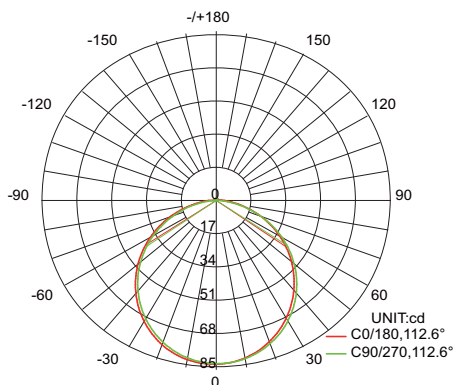

AVERAGE BEAM ANGLE(50%):112.6°

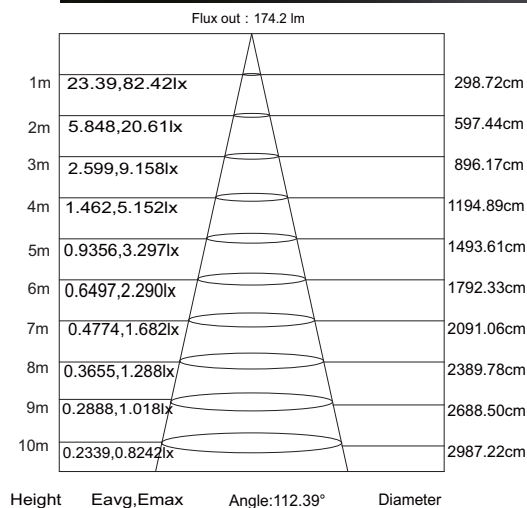

Note: The above data is based on 24V monochrome 4000K color temperature.


Effective average illuminance

【Parameters】

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

| SKU# | CCT/ Color Tone | CRI | Rated Working Voltage | Rated Power | Lumens | Length | Weight | QTY/ Box |
|---------------------|--------------------|-----|--------------------------|----------------------|------------------------|---------------------|--------------|---------------|
| LS-DN0306V12W7L5-WW | 3000K | >90 | 12 V | 7.2 W/m 2.19 W/ft | 185 LM/M (56LM/ft) | 5 Meter (16.4ft) | 0.115 Kg/pcs | 30 Pcs/Box |
| LS-DN0306V12W7L5-DW | 4000K | | | | 200 LM/M (60 LM/ft) | | 3.45 Kg/Box | |

【Notes】

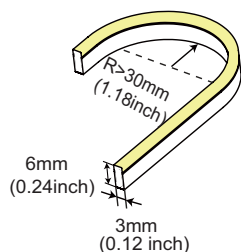

No stretching



No distortion



No trampling