


## Flexi Neon: DN 0611 Series

### 【Features】

- **Flexible and Durable:** Provides even light output.
- **Resistant to Acid, Alkali, Corrosive Gases and UV**
- **Waterproof:** Made with environmentally friendly silicone.
- **Certified Compliance:** cULus, ROHS, and UKCA
- **High Luminous Efficiency:** Meets LM80 requirements.
- **Operating/Storage Temperature:** -25°C to 55°C (Operating), 0°C to 60°C (Storage).
- **Application:** Indoor lighting.



### 【Light Distribution】

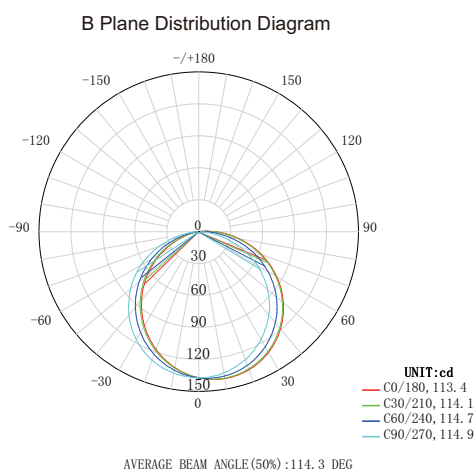

Illuminance-Distance Curve

Height	Eavg, Emax	Angle: 113.38deg	Diameter
1m	39.53, 138.61x		304.36cm
2m	9.883, 34.641x		608.72cm
3m	4.392, 15.401x		913.08cm
4m	2.471, 8.6611x		1217.44cm
5m	1.581, 5.5431x		1521.80cm
6m	1.098, 3.8491x		1826.16cm
7m	0.8067, 2.8281x		2130.52cm
8m	0.6177, 2.1651x		2434.88cm
9m	0.4880, 1.7111x		2739.24cm
10m	0.3953, 1.3861x		3043.60cm

Effective average illuminance

Note: The above data is based on 24V monochrome 4000K color temperature.

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

### 【Parameters】

SKU#	CCT/ Color Tone	CRI	Rated Working Voltage	Rated Power	Lumens	Length	Weight	QTY/ Box
LS-DN0611V12W10L5-WW	3000K	>90	12 V	9.6 W/m 2.9 W/ft	288 LM/M (87LM/ft)	5 Meter (16.4ft)	0.45 Kg/pcs 11.25 Kg/Box	25Pcs/Box
LS-DN0611V12W10L5-DW	5000K							

### 【Notes】

