


ECO Series- D60 12V 8mm


【Features】

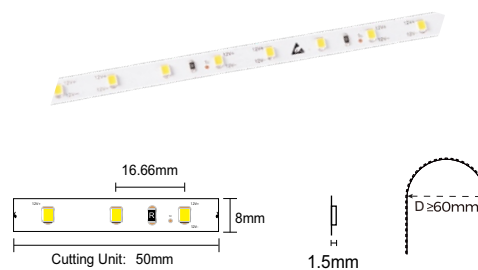

【Parameters】

SKU#	CCT/ Color Tone	CRI	Rated Working Voltage	Rated Power	Lumens @ 4000K	Length	Weight	QTY/ Box
LS-D60V12W5L5-WW	3000K	>90	12 V	4.8 W/m 1.5 W/ft	520 LM/M (158LM/ft)	5 Meter (16.4ft)	0.11 Kg/pcs 7.3 Kg/Box	60Pcs/Box 41x41x26 mm
LS-D60V12W5L5-DW	4000K							
LS-D60V12W5L5-CW	6500K							
LS-D60V12W5L50-WW	3000K					50 Meter (165 ft)	0.87 Kg/pcs 11.4 Kg/Box	13 Pcs/Box 41x41x26 mm
LS-D60V12W5L50-DW	4000K							
LS-D60V12W5L50-CW	6500K							

【Light Distribution】

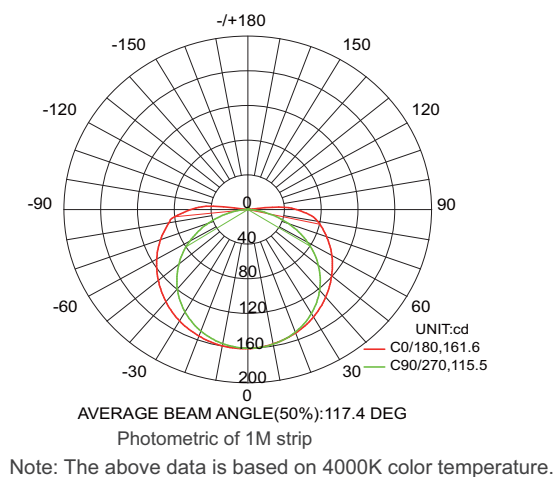

Flux out:393.5 lm

Height	Eavg, Emax	Angle:138.50deg	Diameter
1m	45.28, 170.7 lx		328.48 cm
2m	11.31, 42.72 lx		656.96 cm
3m	5.024, 18.99 lx		985.45 cm
4m	2.826, 10.68 lx		1313.93 cm
5m	1.809, 6.835 lx		1642.41 cm
6m	1.256, 4.747 lx		1970.89 cm
7m	0.9229, 3.487 lx		2299.37 cm
8m	0.7066, 2.670 lx		2627.86 cm
9m	0.5583, 2.110 lx		2956.34 cm
10m	0.4522, 1.709 lx		3284.82 cm